



eLucent™ MINI Wall pack

Model:

WPMN20-3K

WPMN20-5K

WPMN40-3K

WPMN40-5K

Performance Summary

Power Consumption	20 W	40 W
Lumens	2100 lm	3200 lm
Input	100~277VAC/0.18A	100~277VAC/0.35A
Luminous efficacy	Typ. 90+ lm/W	Typ. 85+ lm/W



CCT: 3000K / 5000K

Color Accuracy: CRI 80, R9>20

L70 lifetime: 60,000h

Lumen Maintenance@6000h: 97.23%

PF/THD: >0.9/<20%

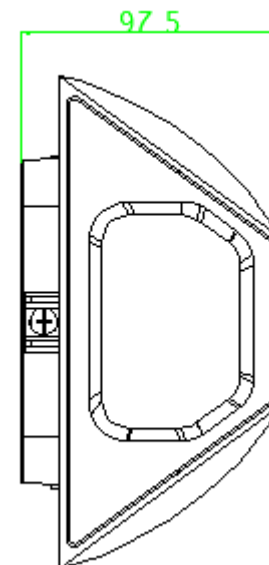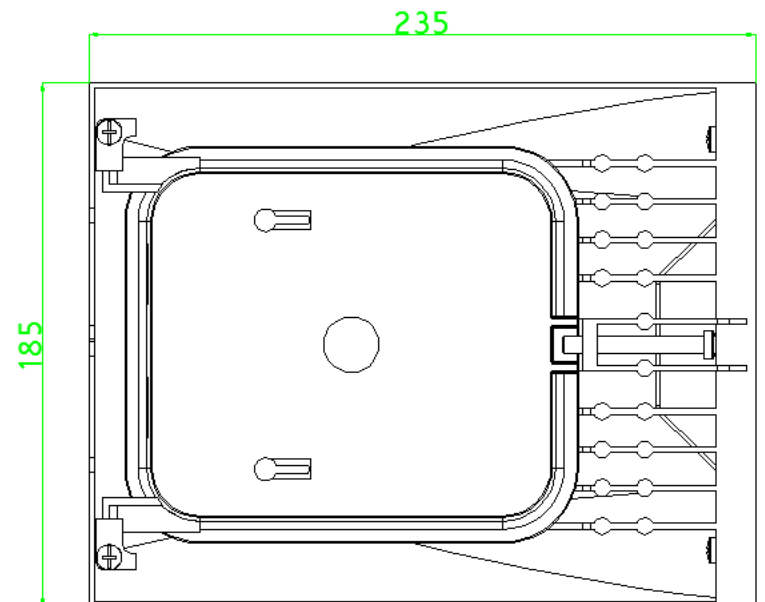

Ordering Information

Typical Order Example: WPMN20-3K

SERIES	WATT	CCT	OPTION
WPMN=Mini Wall Pack	20=20W 40=40W	3K=3000K 5K=5000K	(blank)=Default

Product Specifications

CONSTRUCTION & MATERIALS	
Dimension	235*185*97.5mm (9.25*7.28*3.84 inch)
Housing	Die cast Aluminum and glass diffuser
Finish Color	Gray
Lens Type	Glass

ENVIRONMENTAL SYSTEM	
Work Environment	Indoor and outdoor use
Operating Temperature	-20~50°C (-4~122°F)

OPTICAL SYSTEM		
Type	20 W	40 W
Luminous Flux	2100 lm	3200 lm
Luminous Efficacy	95+ lm/W	85 lm/W
Color Temperature	3000 K, 5000 K	
CRI	80	
Lumen maintenance at 6000h	97.23%	

ELECTRICAL SYSTEM		
Type	20 W	40 W
Input Voltage/Current	100~277VAC/0.18A	100~277VAC/0.35A
Off State Power	0W	
Power Factor	>0.9	
THD	<20%	
Dimming	0~10V continuous dimming	



REGULATORY & VOLUNTARY QUALIFICATIONS
ETL & cETL Listed (ETL No.: 4003329)
CE
RoHS
UL/cUL, KEMA, and CE certified external driver
IES



www.atgelectronics.com Phone: 951-245-6222 Fax: 951-245-7770 Toll free: 877-461-5333



ATG ELECTRONICS